




Zubehör - Einbauanleitung

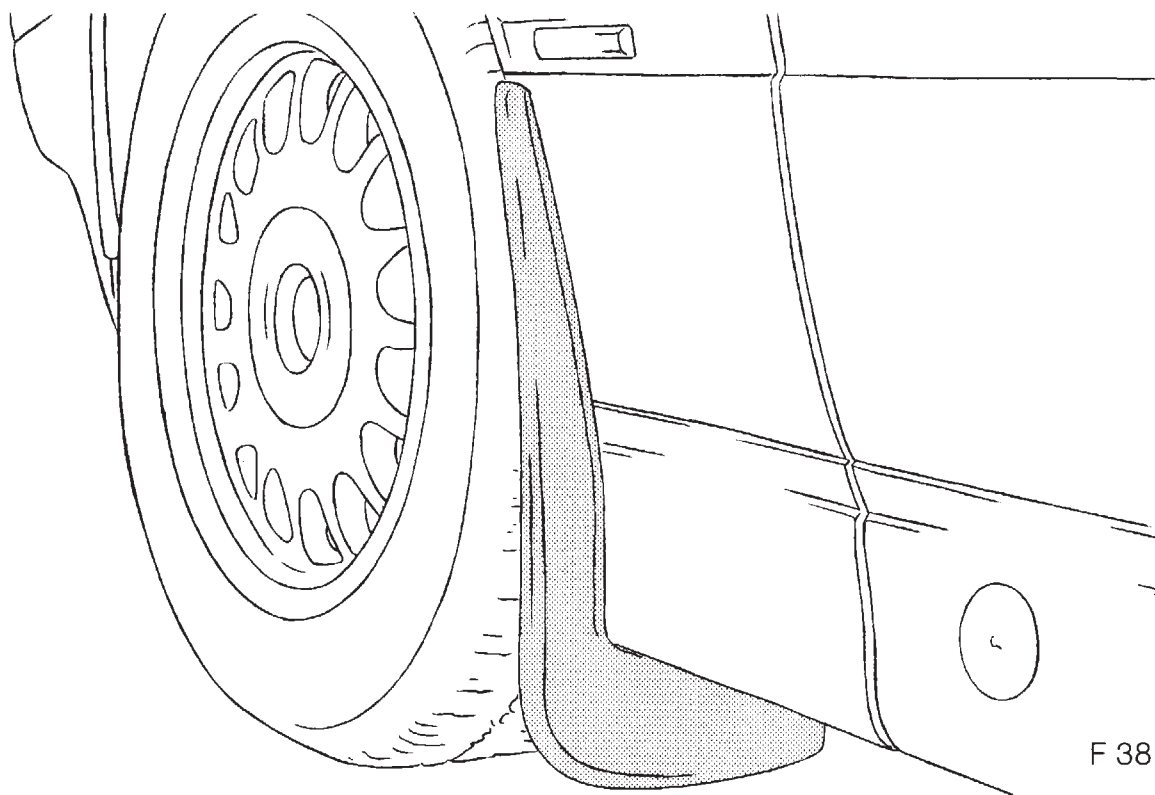

F 38 82 009

Installation Instructions

Front Mud Flap
BMW 7 Series E38

Front Mud Flap BMW 7 Series E38

Installation time approx. 10 minutes which can vary depending on the condition and equipment of the vehicle.

The installation procedure is shown on the right-hand side of the vehicle. Installation on the left-hand side of the vehicle takes place in the same order but mirror-inverted.

Necessary Tools

Screwdriver for slotted screws
Multigrip pliers

F 38 82 010

With the aid of a screwdriver, lever out expanding pin (1) in wheel well trim panel.
Remove body rivet (2) from wheel well trim panel.

Note

Clean place of installation before installing mud flap.

F 38 82 011

Position mud flap exactly in place of installation.
Fit body rivet (1) through hole (2) of mud flap and into wheel well trim panel. Fit expanding pin (3) in body rivet (1) as far as it will go.

F 38 82 012

Fit socket parts (1) in recesses of mud flap (2).
Pull retaining clip (3) with multigrip pliers over fold of mud flap and into socket part until retaining clip can be felt to engage in position.
Check that retaining clip (3) is firmly fitted.

